NEC
ELECTRON DEVICE

NPN SILICON TRANSISTOR
2SC1400

DESCRIPTION The 2SC1400 is designed for use in AF low noise amplifier of a high-class STEREO SET.

FEATURES

- High Voltage : 80 V
- High h_{FE} and excellent h_{FE} linearity.
  - h_{FE} (I_C = 0.5 mA)(V_{CE} = 3 V) : 600 TYP.
  - h_{FE1} (0.1 mA)/h_{FE2} (1.0 mA)(V_{CE} = 3 V) : 0.92 TYP.
- Low noise voltage : 22 mV TYP.

PACKAGE DIMENSIONS
in millimeters (inches)

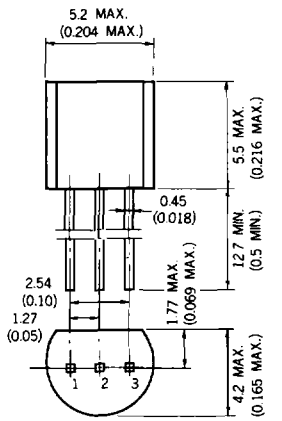

1. EMITTER
2. COLLECTOR
3. BASE

EIAJ : SC-43
JEDEC : TO-92
IEC : PA33

ABSOLUTE MAXIMUM RATINGS

Maximum Temperatures

Storage Temperature ..... −55 to +125 °C

Junction Temperature .....+125 °C Maximum

Maximum Power Dissipation (Ta = 25 °C)

Total Power Dissipation ..... 250 mW

Maximum Voltages and Currents (Ta = 25 °C)

V_{CBO} Collector to Base Voltage ..... 100 V

V_{CEO} Collector to Emitter Voltage ..... 80 V

V_{EBO} Emitter to Base Voltage ..... 5.0 V

I_C Collector Current ..... 50 mA

I_B Base Current ..... 10 mA

ELECTRICAL CHARACTERISTICS (Ta = 25 °C)

SYMBOL	CHARACTERISTIC	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
h_{FE1}	DC Current Gain	170	560		–	V_{CE}=3.0 V, I_C=0.1 mA
h_{FE2}	DC Current Gain	225	600	1000	–	V_{CE}=3.0 V, I_C=0.5 mA
NF_1	Noise Figure		2.8	10	dB	V_{CE}=6.0 V, I_C=0.3 mA, R_G=10 kΩ, f=10 Hz
NF_2	Noise Figure		0.8	3.0	dB	V_{CE}=6.0 V, I_C=0.3 mA, R_G=10 kΩ, f=100 Hz
NV	Noise Voltage		22	30	mV	See test circuit
f_T	Gain Bandwidth Product	50	100		MHz	V_{CE}=6.0 V, I_E=−1.0 mA
C_{ob}	Output Capacitance		2.7	5.0	pF	V_{CB}=6.0 V, I_E=0, f=1.0 MHz
I_{CBO}	Collector Cutoff Current			50	nA	V_{CB}=100 V, I_E=0
I_{CEO}	Collector Cutoff Current			1.0	μA	V_{CE}=60 V, I_B=0
I_{EBO}	Emitter Cutoff Current			50	nA	V_{EB}=5.0 V, I_C=0
V_{BE}	Base to Emitter Voltage	0.55	0.58	0.65	V	V_{CE}=3.0 V, I_C=0.5 mA
$V_{CE(sat)}$	Collector Saturation Voltage		0.09	0.3	V	I_C=50 mA, I_B=5.0 mA
$V_{BE(sat)}$	Base Saturation Voltage		0.81	1.0	V	I_C=50 mA, I_B=5.0 mA

Classification of h_{FE2}

Rank	F	E	U
Range	225 − 450	350 − 700	500 − 1000

h_{FE} Test Conditions : V_{CE} = 3.0 V, I_C = 0.5 mA

TYPICAL CHARACTERISTICS (Ta = 25 °C unless otherwise noted)

TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE



NORMALIZED COLLECTOR CUTOFF CURRENT vs. AMBIENT TEMPERATURE

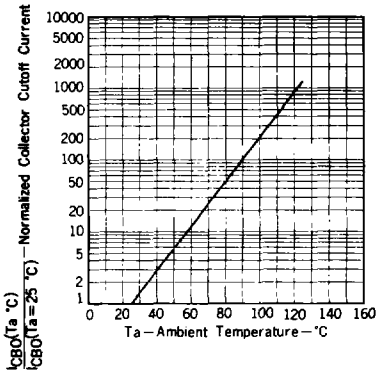

COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE



COLLECTOR CURRENT vs. COLLECTOR TO EMITTER VOLTAGE



DC CURRENT GAIN vs. COLLECTOR CURRENT

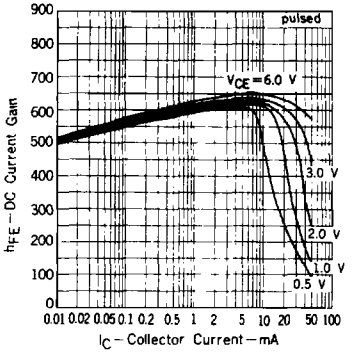

DC CURRENT GAIN vs. COLLECTOR CURRENT

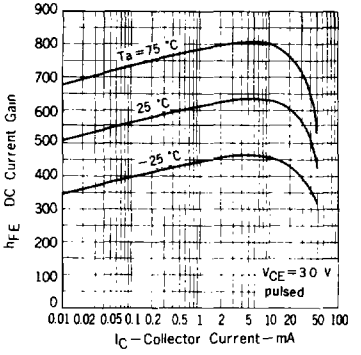

COLLECTOR CURRENT vs. BASE TO EMITTER VOLTAGE



COLLECTOR AND BASE SATURATION VOLTAGE vs. COLLECTOR CURRENT

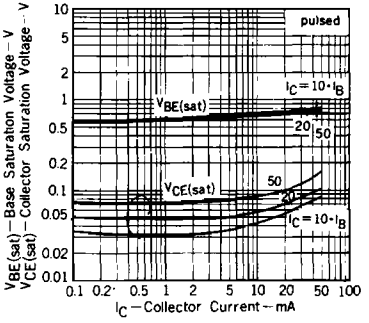

GAIN BANDWIDTH PRODUCT vs. EMITTER CURRENT

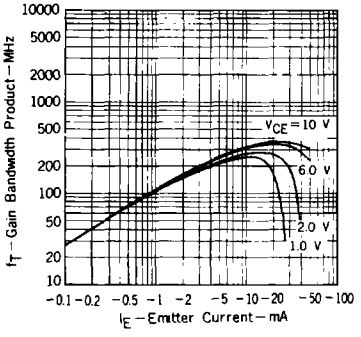

OUTPUT AND INPUT CAPACITANCE vs. REVERSE VOLTAGE

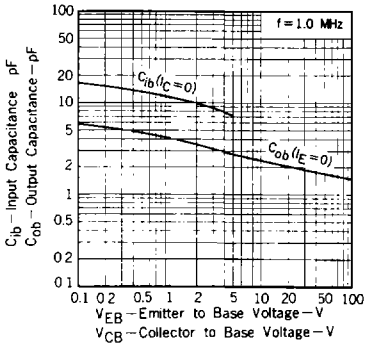

SMALL SIGNAL CURRENT GAIN vs. DC CURRENT GAIN

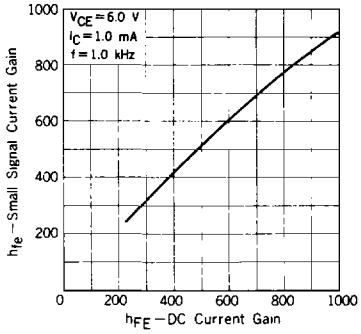

INPUT IMPEDANCE, VOLTAGE FEEDBACK RATIO AND OUTPUT ADMITTANCE vs. SMALL SIGNAL CURRENT GAIN

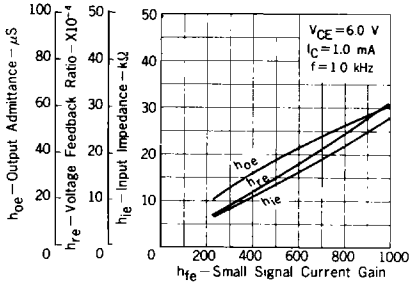

NORMALIZED h-PARAMETERS vs. COLLECTOR CURRENT

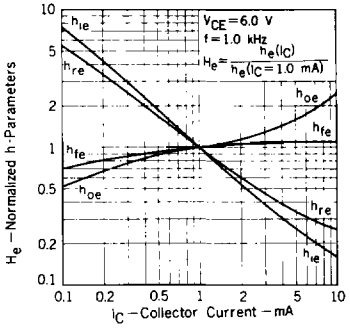

NORMALIZED h-PARAMETERS vs. COLLECTOR TO EMITTER VOLTAGE



E_n AND I_n vs. COLLECTOR CURRENT

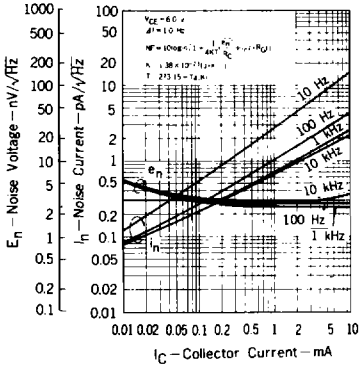

NOISE FIGURE MAP 1

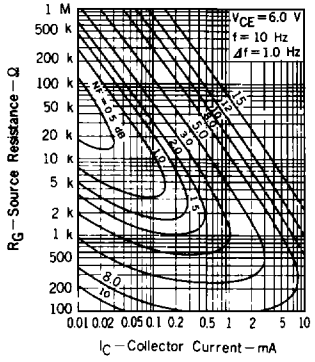

NOISE FIGURE MAP 2

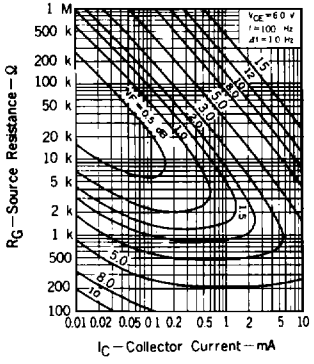

NOISE FIGURE MAP 3

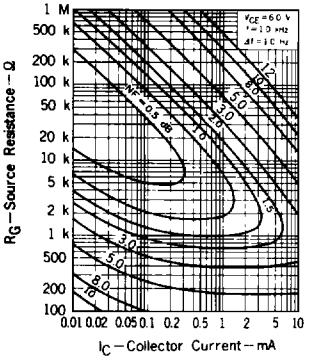

VOLTAGE GAIN vs. FREQUENCY

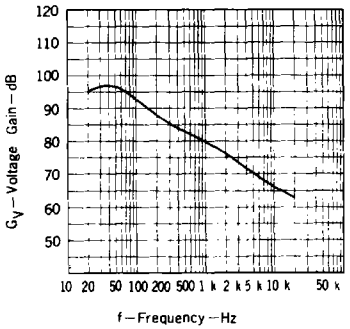

NOISE VOLTAGE TEST CIRCUIT

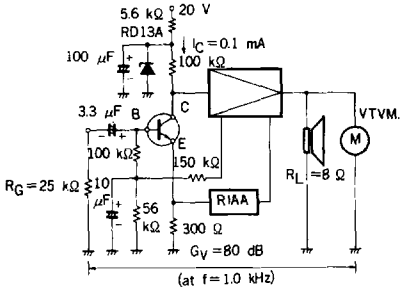

$V_{CE} \doteqdot 3$ V, $I_C = 0.1$ mA, $R_G = 25$ kΩ, $G_V = 80$ dB (at f = 1 kHz) RIAA

2